


FL017 Specification

Center Frequency	2492.5MHz
Bandwidth (equi ripple)	14.5 +/-2.5MHz
Insertion Loss	0.8dBMax Typ 0.6dB. (Midband)
Rejection	
@ 2470 MHz	>= 27.9dB
@ 2525 MHz	>= 39.6dB
VSWR	<= 1.6:1 (return loss 12.7dB)
Impedance	50 Ohms
Connector Input	SMA Female
Connector Output	SMA Female
Size	155 x 92 x 55
Temperature Range	-10 - 50 Deg C

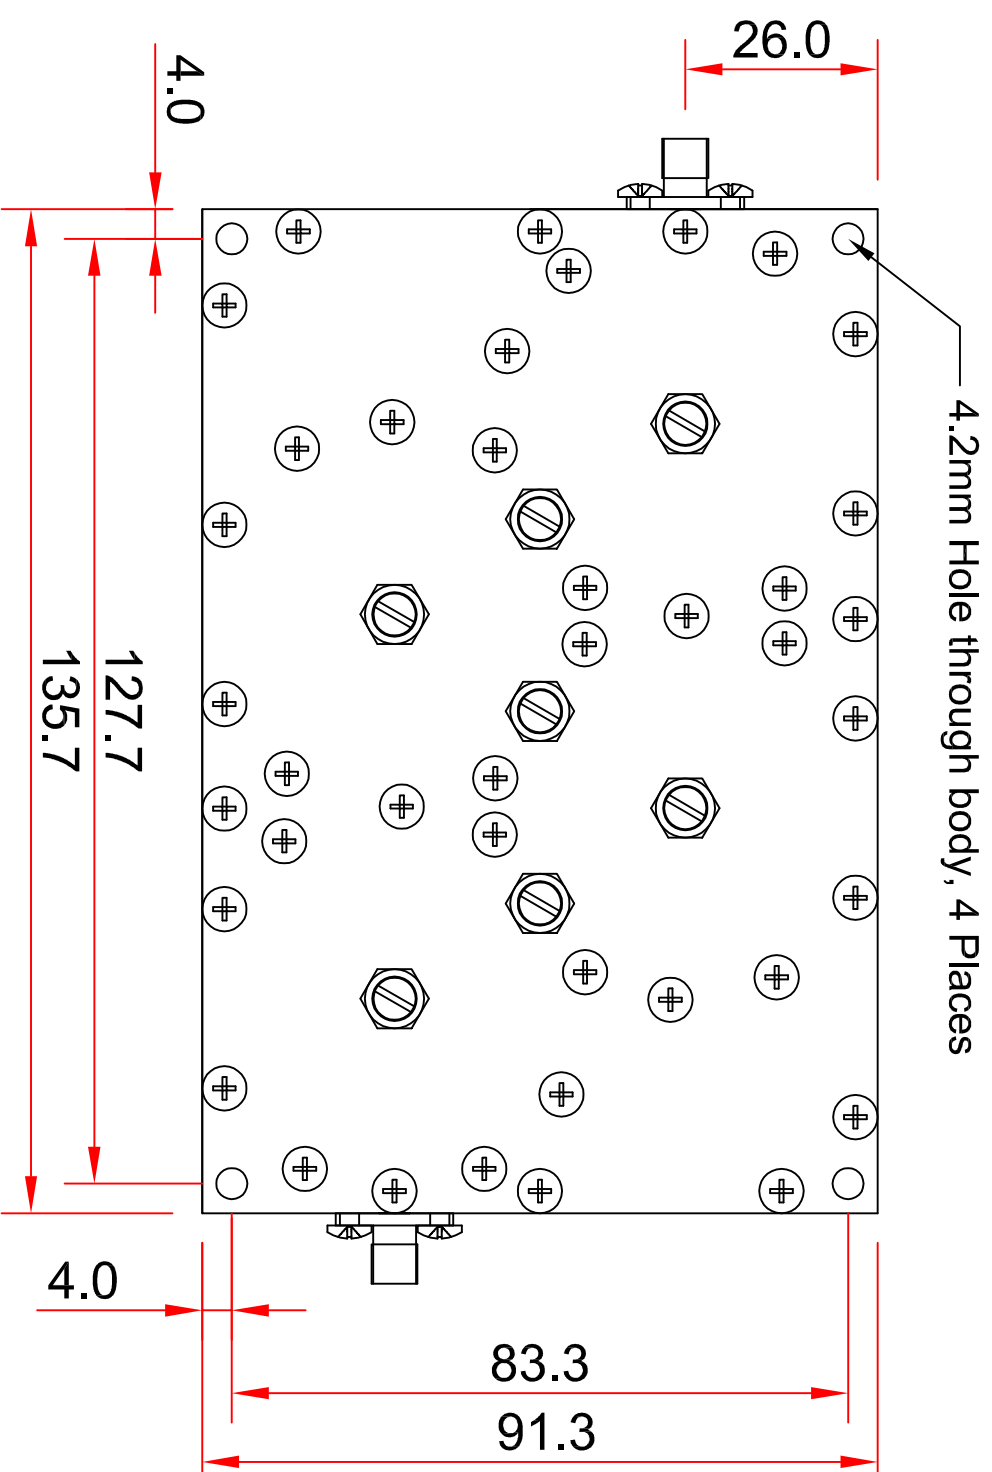

CONFIDENTIAL
 Copyright Stancom Pty Ltd
 This drawing is the property of Stancom Pty Ltd and embodies confidential information, trade secret information, and/or know-how which is the property of Stancom. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing, or any information or know-how embodied therein, to any third party without prior written authorization.

Itemref	Quantity	Title/Name, designation, material, dimension etc	Article No./Reference
Designed by PDS	Checked by PDS	Approved by - date PROVISIONAL - PDS	Filename 100088.dwg Date 04/08/2014

STANCOM

FL017V2 Interface / Datasheet

100088

Edition B
 Sheet 1/1